



# KOMP

## Portable Presses



### Very light press


FONMAR has developed this vulcaniser considering the main needs of our customers: a quick and easy-to-carry press.

- **Komp 1000x500 (Komp 4220) 169Kg (372Lb)**



### Fonmar pressure bag

Supplying a uniform pressure and minimizes the tension in the frames, thanks to the new structure.

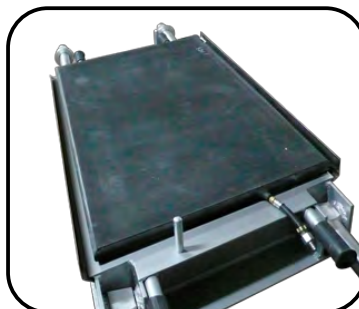

### Very fast and automatic process

Komp 800x500 (Komp 3220) (380V III) takes less than 24 minutes to reach 150°C (302°F) from 20°C (68°F).



### Side-by-Side

Two or more presses can be gathered to make longer splices.



Material	• Aluminium
Control box	• Automatic process • ATRS (Automatic temperature regulator system) • Air pressure regulator • Voltmeter
Pressure	• Bottom airbag • Max. o.p. 7kg/cm <sup>2</sup> (K7)
Heating	• Shielded heating elements • Max. T. 185°C (365°F)
Cooling	• Water
Belt Width	• Up to 1800mm (72")
Length of platen	• 365, 522, 627, 728, 832, 1664 mm (14", 21", 25", 29", 32" or 65")
Platen angle	• 16°, 22° or 90°



Komp 1800x1600



Komp 800x350

Press is delivered with: Control box, water pump, case with electrical and cooling connections